



---

**Project Name :** Amore\_Asset\_U2L - WEB

**Department :**

**Focus Area :** WAS Migration

**Product/Process :** - WEBSPPHERE, - Tomcat

---

**Executed By :**


Owner(s)	Project/Organization Role

## TABLE OF CONTENTS

<b>1.</b>	.....	<b>1</b>
1.1.	.....	1
1.2.	.....	1
1.3.	.....	1
<b>2.</b>	.....	<b>3</b>
2.1.	.....	3
2.1.1. JAR	.....	3
2.1.2. WAR	.....	3
2.1.3. EAR	.....	3
<b>3.</b>	.....	<b>4</b>
3.1.	.....	4
3.2.	.....	4
3.2.1. Servlet	.....	4
3.2.2. JSP	.....	12
3.2.3. Properties	.....	13
3.2.4. Class	.....	14
3.3. JSP	.....	15
3.4.	.....	16
3.5. WEB-INF/lib	.....	19
3.6. WEB-INF/lib	.....	23
3.7. WEB-INF/classes	.....	23
<b>4.</b>	<b>– 가</b> .....	<b>24</b>
4.1. application Deployment Descriptor 가	.....	24
4.2. Web Deployment Descriptor 가	.....	24
4.2.1. ibm-web-bnd.xmi	.....	24
4.2.2. jboss-web.xml	.....	24
4.2.3. ibm-web-ext.xmi	.....	24
4.3. EJB Deployment Descriptor 가	.....	25
<b>5. Tomcat</b>	.....	<b>26</b>
5.1. Tomcat	.....	26
5.2.	.....	26

5.3. Tomcat .....	27
5.3.1. env.sh .....	27
5.3.2. start.sh .....	29
5.3.3. stop.sh .....	30
5.3.4. kill.sh .....	30
5.3.5. tail.sh .....	30
5.4. Tomcat .....	30
<b>6. ....</b>	<b>31</b>
<b>7. APPENDICES .....</b>	<b>32</b>
7.1. Document Guidelines .....	32
7.2. Project Migration Report Sections Omitted .....	32

1.

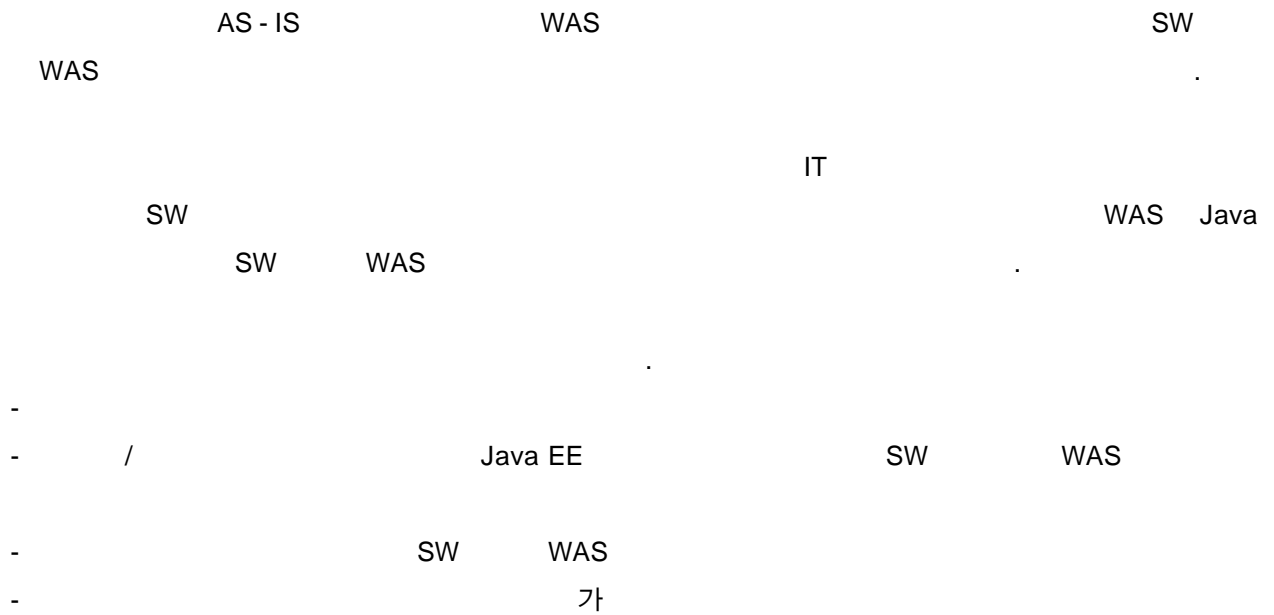

1.1.

100%

1.2.

30%

1.3.

- Java
- JSP
- 
- ear, war, jar
- application.xml, web.xml, vendor - xml
- XML

- Tomcat      JBoss

2.

File Name: ASSET\_WEB.war

2.1.

EAR, WAR, JAR

### 2.1.1. JAR

JAR .class main()  
 , JVM  
 JAR java CLASSPATH  
 CLASSPATH  
 , JAR  
 JAR CLASSPATH  
 JAR main() 가 가  
 JAR JAR

### 2.1.2. WAR

WAR , WAR  
 가 WAR

### 2.1.3. EAR

EAR Jave EE 5 . EAR JAR, WAR, RAR  
 가 , WAS  
 Tier  
 Java EE 5 (Distributed Multitier Application)


## 3.

## WAR(Web Archive)

## 3.1.

*.java	0	N/A	N/A
*.class	1071	N/A	N/A
*.html	50	ISO - 8859 - 1	UTF - 8
*.htm	0	N/A	N/A
*.jsp	638	ISO - 8859 - 1	UTF - 8
*.js	325	ISO - 8859 - 1	UTF - 8
*.css	35	ISO - 8859 - 1	UTF - 8
*.xml	435	ISO - 8859 - 1	UTF - 8
*.properties	10	ISO - 8859 - 1	UTF - 8
*.jar	137	N/A	N/A
DIRECTORY	787	N/A	N/A
SUM	3488	N/A	N/A

## File Count

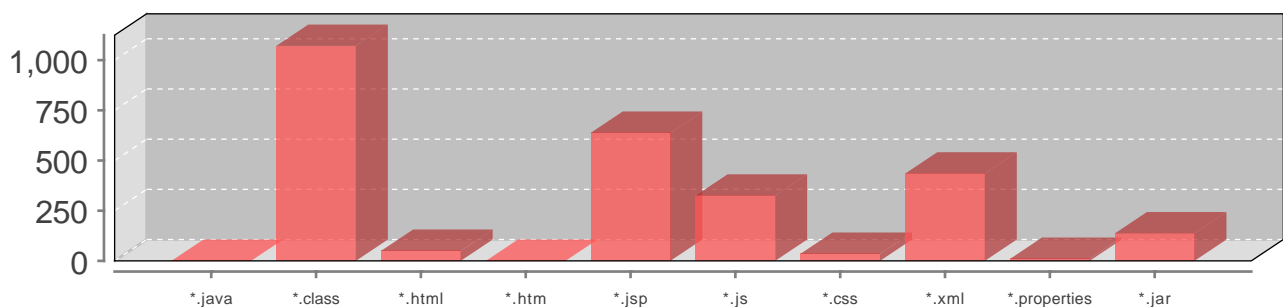

## 3.2.

## 3.2.1. Servlet

EgovSndngMailRegistController.class	\egovframework\com\cop\ems\web\
EgovSndngMailDetailController.class	\egovframework\com\cop\ems\web\
EgovSndngMailDtlsController.class	\egovframework\com\cop\ems\web\
EgovImageProcessController.class	\egovframework\com\cmm\web\
EgovFileMngController.class	\egovframework\com\cmm\web\
EgovFileDownloadController.class	\egovframework\com\cmm\web\
EgovComUtlController.class	\egovframework\com\cmm\web\
EgovComIndexController.class	\egovframework\com\cmm\web\
HTMLTagFilterRequestWrapper.class	\egovframework\com\cmm\filter\
CheckBarTempletController.class	\jeon\user\info\checkBarTemplet\
BoardController.class	\jeon\user\info\board\
BlankTempletController.class	\jeon\user\info\blankTemplet\
HomeAspect.class	\jeon\user\info\aop\
EgovUserManageController.class	\egovframework\com\uss\umt\web\
EgovMberManageController.class	\egovframework\com\uss\umt\web\
EgovEntrprsManageController.class	\egovframework\com\uss\umt\web\
EgovDeptManageController.class	\egovframework\com\uss\umt\web\
EgovLoginController.class	\egovframework\com\uat\uia\web\
EgovCcmZipManageController.class	\egovframework\com\sym\ccm\zip\web\



EgovCalRestdeManageController.class	\egovframework\com\sym\cal\web\
EgovRlnmManageController.class	\egovframework\com\sec\rnc\web\
AssAucReqController.class	\jit\asset\ast\change\assAucReq\
RpuSelectListController.class	\jit\asset\addon\adn\report\rpu\
RpuSelectDeptListController.class	\jit\asset\addon\adn\report\rpu\
laedSelectExcelDownController.class	\jit\asset\addon\adn\laed\
laedSelectDownPopupController.class	\jit\asset\addon\adn\laed\
CommnController.class	\jit\asset\addon\adn\common\
UserInfoController.class	\jeon\user\info\userInfo\
HelloController.class	\jeon\user\info\userInfo\
UITempleatController.class	\jeon\user\info\uiTempleat\
TreeTempletController.class	\jeon\user\info\treeTemplet\
Templet2Controller.class	\jeon\user\info\templet2\
Templet1Controller.class	\jeon\user\info\templet1\
TempAssetController.class	\jeon\user\info\tempAsset\
GrdNoteController.class	\jeon\user\info\grdNote\
FileTempletController.class	\jeon\user\info\fileTemplet\
FileTestController.class	\jeon\user\info\file\
sample1.class	\jeon\user\info\egovTemple\
AssLoseController.class	\jit\asset\ast\dispose\assLose\
AssGiftReqPdfController.class	\jit\asset\ast\dispose\assGiftReq\
AssGiftReqController.class	\jit\asset\ast\dispose\assGiftReq\
AssExplController.class	\jit\asset\ast\dispose\assExpl\

AssTotChgController.class	\\jit\\asset\\ast\\change\\assTotChg\\
AssSapTranController.class	\\jit\\asset\\ast\\change\\assSapTran\\
AssRtnReqInsController.class	\\jit\\asset\\ast\\change\\assRtnReqIns\\
AssRtnReqController.class	\\jit\\asset\\ast\\change\\assRtnReq\\
AssRprReqInsController.class	\\jit\\asset\\ast\\change\\assRprReqIns\\
AssRprReqController.class	\\jit\\asset\\ast\\change\\assRprReq\\
AssQrCodeController.class	\\jit\\asset\\ast\\change\\assQrCode\\
AssQrController.class	\\jit\\asset\\ast\\change\\assQr\\
AssMyAssController.class	\\jit\\asset\\ast\\change\\assMyAss\\
AssMerReqController.class	\\jit\\asset\\ast\\change\\assMerReq\\
AssDivReqController.class	\\jit\\asset\\ast\\change\\assDivReq\\
AssChgReqController.class	\\jit\\asset\\ast\\change\\assChgReq\\
AssBuyReqController.class	\\jit\\asset\\ast\\change\\assBuyReq\\
AssDelReqController.class	\\jit\\asset\\ast\\take\\assDelReq\\
SubDealMonitorController.class	\\jit\\asset\\ast\\monitor\\subDealMonitor\\
SalePriceMonitorController.class	\\jit\\asset\\ast\\monitor\\salePriceMonitor\\
ItDeviceMonitorController.class	\\jit\\asset\\ast\\monitor\\itDeviceMonitor\\
BatchInfoController.class	\\jit\\asset\\ast\\monitor\\batchInfo\\
AstTaxMonitorController.class	\\jit\\asset\\ast\\monitor\\astTaxMonitor\\
AstTaxAmtMonitorController.class	\\jit\\asset\\ast\\monitor\\astTaxAmtMonitor\\
AssItActMonitorController.class	\\jit\\asset\\ast\\monitor\\assItActMonior\\

AssErrChkMonitorController.class	\\jit\\asset\\ast\\monitor\\assErrChkMonitor\\
AssTermiReqPdfController.class	\\jit\\asset\\ast\\dispose\\assTermiReq\\
AssTermiReqController.class	\\jit\\asset\\ast\\dispose\\assTermiReq\\
AssSapDispController.class	\\jit\\asset\\ast\\dispose\\assSapDisp\\
AssSaleReqPdfController.class	\\jit\\asset\\ast\\dispose\\assSaleReq\\
AssSaleReqController.class	\\jit\\asset\\ast\\dispose\\assSaleReq\\
BiddingSaleApiController.class	\\jit\\asset\\ast\\dispose\\assRest\\
AssReasonController.class	\\jit\\asset\\ast\\dispose\\assReason\\
AssPayReqController.class	\\jit\\asset\\ast\\dispose\\assPayReq\\
SapCostcenterController.class	\\jit\\asset\\bas\\sapMapp\\sapCostcenter\\
SapBrandController.class	\\jit\\asset\\bas\\sapMapp\\sapBrand\\
SapAssClassController.class	\\jit\\asset\\bas\\sapMapp\\sapAssClass\\
CompPersonController.class	\\jit\\asset\\bas\\comp\\compPerson\\
CompOrgController.class	\\jit\\asset\\bas\\comp\\compOrg\\
CompInfoController.class	\\jit\\asset\\bas\\comp\\compInfo\\
CompCostController.class	\\jit\\asset\\bas\\comp\\compCost\\
CompCodeController.class	\\jit\\asset\\bas\\comp\\compCode\\
BrhInfoController.class	\\jit\\asset\\bas\\comp\\brhInfo\\
NoticeController.class	\\jit\\asset\\bas\\basInfo\\notice\\
BankAcntController.class	\\jit\\asset\\bas\\basInfo\\bankAcnt\\
UserAuthController.class	\\jit\\asset\\bas\\auth\\userAuth\\
AssSapReqController.class	\\jit\\asset\\ast\\take\\assSapReq\\

AssOutBookReqController.class	\\jit\\asset\\ast\\take\\assOutBookReq\\
AssMstReqController.class	\\jit\\asset\\ast\\take\\assMstReq\\
AssMstChgController.class	\\jit\\asset\\ast\\take\\assMstChg\\
AssDtIMngController.class	\\jit\\asset\\ast\\take\\assDtIMng\\
UserGroupDeptController.class	\\jit\\asset\\bas\\user\\userGroupDept\\
UserGroupAuthController.class	\\jit\\asset\\bas\\user\\userGroupAuth\\
UserConnInfoController.class	\\jit\\asset\\bas\\user\\userConnInfo\\
UserCompAuthController.class	\\jit\\asset\\bas\\user\\userCompAuth\\
UserClassAuthController.class	\\jit\\asset\\bas\\user\\userClassAuth\\
LoginLogController.class	\\jit\\asset\\bas\\user\\loginLog\\
SapClassController.class	\\jit\\asset\\bas\\stand\\sapClass\\
CtrlDeptController.class	\\jit\\asset\\bas\\stand\\ctrlDept\\
CompRiskTrgtController.class	\\jit\\asset\\bas\\stand\\compRiskTrgt\\
AssLocationController.class	\\jit\\asset\\bas\\stand\\assLocation\\
AssDsclsBaseController.class	\\jit\\asset\\bas\\stand\\assDsclsBase\\
AssDefController.class	\\jit\\asset\\bas\\stand\\assDef\\
AssClassMstController.class	\\jit\\asset\\bas\\stand\\assClassMst\\
SapVendorController.class	\\jit\\asset\\bas\\sapMapp\\sapVendor\\
SapCustomerController.class	\\jit\\asset\\bas\\sapMapp\\sapCustomer\\
InsSapController.class	\\jit\\asset\\ins\\insInfo\\insSap\\
InsResultTeamLeaderChkController.class	\\jit\\asset\\ins\\insInfo\\insResultTeamLeaderChk\\

InsResultRegController.class	\\jit\\asset\\ins\\insInfo\\insResultReg\\
InsResultChkController.class	\\jit\\asset\\ins\\insInfo\\insResultChk\\
InsMstController.class	\\jit\\asset\\ins\\insInfo\\insMst\\
InsMonitorController.class	\\jit\\asset\\ins\\insInfo\\insMonitor\\
InsLptController.class	\\jit\\asset\\ins\\insInfo\\insLpt\\
InsInvenNonController.class	\\jit\\asset\\ins\\insInfo\\insInvenNon\\
InsInvenCloseAppvController.class	\\jit\\asset\\ins\\insInfo\\insInvenCloseAppv\\
InsInvenBuInfoController.class	\\jit\\asset\\ins\\insInfo\\insInvenBuInfo\\
InsInvenBuCheckController.class	\\jit\\asset\\ins\\insInfo\\insInvenBuCheck\\
InsInvenAssInfoController.class	\\jit\\asset\\ins\\insInfo\\insInvenAssInfo\\
InsAssExcelDownController.class	\\jit\\asset\\ins\\insInfo\\insAssExcelDown\\
InsActionReqController.class	\\jit\\asset\\ins\\insInfo\\insActionReq\\
UserRegController.class	\\jit\\asset\\bas\\user\\userReg\\
UserPassChgController.class	\\jit\\asset\\bas\\user\\userPassChg\\
UserGroupMappController.class	\\jit\\asset\\bas\\user\\userGroupMapp\\
UserGroupInfoController.class	\\jit\\asset\\bas\\user\\userGroupInfo\\
RepLedgerController.class	\\jit\\asset\\rep\\report\\repLedger\\
RepDisCompController.class	\\jit\\asset\\rep\\report\\repDisComp\\
RepCtrlYearChangeController.class	\\jit\\asset\\rep\\report\\repCtrlYearChange\\
RepCtrlMonthChangeController.class	\\jit\\asset\\rep\\report\\repCtrlMonthChange\\
RepCostController.class	\\jit\\asset\\rep\\report\\repCost\\

RepCompController.class	\\jit\\asset\\rep\\report\\repComp\\
RepClassController.class	\\jit\\asset\\rep\\report\\repClass\\
RepChangeController.class	\\jit\\asset\\rep\\report\\repChange\\
RepAssMstQrInfoController.class	\\jit\\asset\\rep\\report\\repAssMstQrInfo\\
RepAssMonthController.class	\\jit\\asset\\rep\\report\\repAssMonth\\
RepAcqCompController.class	\\jit\\asset\\rep\\report\\repAcqComp\\
InsTotReqController.class	\\jit\\asset\\ins\\insReq\\insTotReq\\
InsResultController.class	\\jit\\asset\\ins\\insReq\\insResult\\
InsPartNotRateController.class	\\jit\\asset\\ins\\insReq\\insPartNotRate\\
InsPartCurRateController.class	\\jit\\asset\\ins\\insReq\\insPartCurRate\\
InsNotListController.class	\\jit\\asset\\ins\\insReq\\insNotList\\
InsClassNotRateController.class	\\jit\\asset\\ins\\insReq\\insClassNotRate\\
MenuController.class	\\jit\\com\\menu\\
MainController.class	\\jit\\com\\main\\
AopController.class	\\jit\\com\\main\\
LoginController.class	\\jit\\com\\login\\
JusoController.class	\\jit\\com\\juso\\
FormatController.class	\\jit\\com\\format\\
deployController.class	\\jit\\com\\deploy\\
SessionMngController.class	\\jit\\com\\common\\
CommonController.class	\\jit\\com\\common\\
PopUpController.class	\\jit\\com\\code\\
CodeController.class	\\jit\\com\\code\\
TestController.class	\\jit\\asset\\test\\
RepTakeController.class	\\jit\\asset\\rep\\report\\repTake\\
RepPartController.class	\\jit\\asset\\rep\\report\\repPart\\

CompModuController.class	\\jit\\sys\\pgm\\compModu\\
EncryptController.class	\\jit\\sys\\enc\\encrypt\\
CompAdminIdController.class	\\jit\\sys\\cust\\compAdminId\\
CompCommCodeController.class	\\jit\\sys\\code\\compCommCode\\
CommCodeController.class	\\jit\\sys\\code\\commCode\\
MblLoginController.class	\\jit\\mbl\\com\\login\\
MblMainController.class	\\jit\\mbl\\ccm\\main\\
SysQnaController.class	\\jit\\inf\\support\\sysQna\\
SysNoticeController.class	\\jit\\inf\\support\\sysNotice\\
SysIfHisController.class	\\jit\\inf\\support\\sysIfHis\\
SysFaqCatController.class	\\jit\\inf\\support\\sysFaqCat\\
SysErrReqController.class	\\jit\\inf\\support\\sysErrReq\\
AssUserReqController.class	\\jit\\inf\\support\\assUserReq\\
AssMstTrandController.class	\\jit\\inf\\support\\assMstTrand\\
CrossDomain.class	\\jit\\com\\util\\
TempController.class	\\jit\\com\\
PgmListController.class	\\jit\\sys\\pgm\\pgmList\\
ModuController.class	\\jit\\sys\\pgm\\modu\\
CompPgmListController.class	\\jit\\sys\\pgm\\compPgmList\\

### 3.2.2. JSP

1\\logon.jsp

```
Line 20 :    //returnUrl = Util.uRLEncode("http://10.155.8.147:8316/nsso.jsp", "UTF - 8");
```

## 1\WEB - INF\config\ast\AssQrCodeList.jsp

```
Line 26 : <script type="text/javascript" src="<c:url value='/js/barcode/BrowserPrint -
2.0.0.75.min.js'/>" charset="UTF - 8"></script>
```

## 1\WEB - INF\jsp\asset\ast\AssQrCodeList.jsp

```
Line 26 : <script type="text/javascript" src="<c:url value='/js/barcode/BrowserPrint -
2.0.0.75.min.js'/>" charset="UTF - 8"></script>
```

## 1\WEB - INF\jsp\asset\bas\UserCompAuthList.jsp

```
Line 128 : gridView1.setColumnProperty("col2", "lookupDisplay", true);
```

## 1\WEB - INF\jsp\asset\egovframework\com\uat\uia\EgovGpkiInstall.jsp

```
Line 114 : location.href =
"/html/egovframework/com/uat/uia/setup/install_off_v1.0.2.8.exe";
Line 84 : <a
href='/html/egovframework/com/uat/uia/setup/install_on_v1.0.4.9.exe'></a>
```

### 3.2.3. Properties

## 1\WEB - INF\classes\egovframework\egovProps\globals.properties

```
Line 20 : Globals.LocalIp = 127.0.0.1
Line 41 : #Globals.Url=jdbc:mysql://localhost:3306/egov
```



```
Line 46 : #Globals.Url=jdbc:oracle:thin:@1.214.207.43:1521:apasset  
Line 48 : Globals.Url=jdbc:oracle:thin:@10.155.8.154:1528:NTUTF  
Line 51 : #Globals.Url=jdbc:oracle:thin:@10.129.31.68:1527:BIZDB
```

1\WEB-INF\classes\sso.properties

```
Line 2 : SITESERVER_IP=10.129.31.171
```

### 3.2.4. Class

egovframework\com\utl\fcc\service\EgovDateUtil.class

```
# 1 : * com.ibm.icu.util.ChineseCalendar  
# 2 : import com.ibm.icu.util.ChineseCalendar;
```

jeon\user\info\fileTemplet\service\impl\FileTempletServiceImpl.class

```
# 1 : * com.ibm.icu.text.DecimalFormat  
# 2 : import com.ibm.icu.text.DecimalFormat;
```


jit\asset\ast\change\assMyAss\AssMyAssController.class

jit\com\deploy\service\impl\DeployServiceImpl.class

jit\com\util\SftpUtil.class

jit\com\util\CrossDomain.class

jit\com\util\AssetInterceptor.class



### 3.3. JSP

[Amore\_Asset\_U2L - WEB] JSP 638 가 , JSP page directive .

, 가 .

directive	
<%@ page import="com.nets.sso.agent.ErrorMessage"%>	1
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	529
<%@ page language = "java" contentType = "text/html; charset=UTF - 8"%>	1
<%@page import="java.util.Date"%>	1
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	1
<%@page contentType="text/html; charset=UTF - 8" %>	2
<%@ page import="com.nets.sso.agent.CryptEncType"%>	1
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	1
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	5
<%@page import="egovframework.rte.psl.dataaccess.util.EgovMap"%>	2
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	2
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	1
<%@ page language="java" contentType="javascript/x - javascript" %>	1
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	1
<%@page import="jit.com.util.Utils"%>	7

<%@ page language="java" contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	16
<%@ page language="java" contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	11
<%@ page contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	2
<%@ page language="java" contentType="text/html; charset=UTF - 8" pageEncoding="UTF - 8"%>	2
<%@ page contentType="text/html; charset=UTF - 8"%>	41
<%@ page import="com.nets.sso.agent.AuthCheck" %>	1
<%@page import="jit.asset.ast.dispose.assSaleReq.service.impl.AssSaleReqVO"%>	4
<%@ page import="com.nets.sso.agent.*" %>	2

## 3.4.

## web.xml

```

<?xml version="1.0" encoding="UTF - 8"?>
<web - app xmlns:xsi="http://www.w3.org/2001/XMLSchema - instance"
xmlns="http://java.sun.com/xml/ns/j2ee"
xmlns:javaee="http://java.sun.com/xml/ns/javaee"
xmlns:web="http://java.sun.com/xml/ns/javaee/web - app_2_5.xsd"
xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
http://java.sun.com/xml/ns/j2ee/web - app_2_4.xsd" id="WebApp_ID" version="2.4">
  <display - name>egovframework.ebt</display - name>
  <filter>
    <filter - name>encodingFilter</filter - name>
    <filter - class>
org.springframework.web.filter.CharacterEncodingFilter
</filter - class>
    <init - param>
      <param - name>encoding</param - name>
      <param - value>UTF - 8</param - value>
    </init - param>
  </filter>
  <filter - mapping>
    <filter - name>encodingFilter</filter - name>

```

```
<url - pattern> *.do</url - pattern>
</filter - mapping>
<filter - mapping>
  <filter - name>encodingFilter</filter - name>
  <url - pattern> *.mdo</url - pattern>
</filter - mapping>
<filter>
  <filter - name>HTMLTagFilter</filter - name>
  <filter - class>
    egovframework.rte.ptl.mvc.filter.HTMLTagFilter
  </filter - class>
</filter>
<context - param>
  <param - name>contextConfigLocation</param - name>
  <param - value>
    classpath*:egovframework/spring/com/context - *.xml
  </param - value>
</context - param>

<!-- JSP Template Inheritance -->
<context - param>
  <param - name>jsp - inheritance - prefix</param - name>
  <param - value>/WEB-INF/jsp/layouts/</param - value>
</context - param>

<context - param>
  <param - name>jsp - inheritance - suffix</param - name>
  <param - value>.jsp</param - value>
</context - param>
<!-- JSP Template Inheritance -->

<listener>
  <listener -
class>org.springframework.web.context.ContextLoaderListener</listener - class>
  </listener>
<servlet>
  <servlet - name>action</servlet - name>
  <servlet - class>
    org.springframework.web.servlet.DispatcherServlet
  </servlet - class>
  <init - param>
    <param - name>contextConfigLocation</param - name>
    <param - value>
```

```
        /WEB-INF/config/egovframework/springmvc/*.xml
    </param - value>
</init - param>
<load - on - startup>1</load - on - startup>
</servlet>
<servlet - mapping>
    <servlet - name>action</servlet - name>
    <url - pattern>*.do</url - pattern>
</servlet - mapping>
<servlet - mapping>
    <servlet - name>action</servlet - name>
    <url - pattern>*.mdo</url - pattern>
</servlet - mapping>
<welcome - file - list>
    <welcome - file>index.jsp</welcome - file>
</welcome - file - list>
<login - config>
    <auth - method>BASIC</auth - method>
</login - config>
<session - config>
    <session - timeout>60</session - timeout>
</session - config>
<error - page>
    <exception - type>java.lang.Throwable</exception - type>
    <location>/common/error.jsp</location>
</error - page>
<error - page>
    <error - code>404</error - code>
    <location>/common/error.jsp</location>
</error - page>
<error - page>
    <error - code>500</error - code>
    <location>/common/error.jsp</location>
</error - page>
<error - page>
    <error - code>400</error - code>
    <location>/common/error.jsp</location>
</error - page>
<error - page>
    <error - code>402</error - code>
    <location>/common/error.jsp</location>
</error - page>
<error - page>
```

```
<error - code>403</error - code>
<location>/common/error.jsp</location>
</error - page>
</web - app>
```

### 3.5. WEB - INF/lib

lib

activation - 1.1.jar
ajaxtags - 1.5 - beta - 0.2.jar
antlr - 2.7.7.jar
antlr - 3.0.1.jar
aopalliance - 1.0.jar
asm - 3.1.jar
aspectjrt - 1.6.9.jar
aspectjweaver - 1.6.11.jar
batik - awt - util.jar
batik - bridge.jar
batik - css.jar
batik - dom.jar
batik - ext - 1.7.jar
batik - ext.jar
batik - gvt.jar
batik - parser.jar
batik - script.jar
batik - svg - dom.jar
batik - transcoder.jar
batik - util.jar
batik - xml.jar
cglib - 2.2.jar
cglib - nodep - 2.2.jar

commons - beanutils - 1.8.3.jar
commons - codec - 1.4.jar
commons - codec - 1.6.jar
commons - collections - 3.2.jar
commons - compress - 1.1.jar
commons - dbcp - 1.3.jar
commons - digester - 1.8.jar
commons - email - 1.2.jar
commons - fileupload - 1.2.1.jar
commons - httpclient - 2.0.1.jar
commons - io - 1.3.1.jar
commons - jexl - 1.1.jar
commons - lang - 2.6.jar
commons - logging - 1.1.1.jar
commons - logging - 1.1.3.jar
commons - net - 3.0.1.jar
commons - pool - 1.5.4.jar
commons - validator - 1.3.1.jar
commons - vfs - 1.0.jar
core - 2.0.jar
dom4j - 1.6.1.jar
easymock - 3.0.jar
egovframework.rte.fdl.cmmn - 2.0.0.jar
egovframework.rte.fdl.excel - 2.0.0.jar
egovframework.rte.fdl.filehandling - 2.0.0.jar
egovframework.rte.fdl.idgnr - 2.0.0.jar
egovframework.rte.fdl.property - 2.0.0.jar
egovframework.rte.fdl.security - 2.0.0.jar
egovframework.rte.fdl.string - 2.0.0.jar
egovframework.rte.fdl.xml - 2.0.0.jar

egovframework.rte.psl.dataaccess - 2.0.0.jar
egovframework.rte.ptl.mvc - 2.0.0.jar
ehcache - core - 2.4.1.jar
ehcache - terracotta - 2.1.1.jar
ezmorph - 1.0.6.jar
fluent - hc - 4.3.6.jar
hsqldb - 1.8.0.10.jar
httpClient - 4.3.6.jar
httpClient - cache - 4.3.6.jar
httpcore - 4.3.3.jar
httpmime - 4.3.6.jar
ibatis - sqlmap - 2.3.4.726.jar
icu4j - 4.8.jar
itext - pdfa - 5.5.6.jar
itext - xtra - 5.5.6.jar
itextpdf - 5.5.6.jar
jackson - core - asl - 1.8.0.jar
jackson - mapper - asl - 1.8.0.jar
jakarta - regexp - 1.4.jar
javase - 2.0.jar
jdom - 1.1.jar
jodconverter - 2.2.1.jar
jsch - 0.1.51.jar
json - lib - 2.4 - jdk15.jar
jsp - inheritance - 0.2.jar
jsr250 - api - 1.0.jar
jsso - agent.jar
jstl - 1.2.jar
jta - 1.1.jar
juh - 2.3.0.jar



junit - 4.8.1.jar
jurt - 2.3.0.jar
jxls - core - 0.9.9.jar
jxls - reader - 0.9.9.jar
log4j - 1.3alpha - 8.jar
log4jdbc3 - 1.1.jar
mail - 1.4.1.jar
mysql - connector - java - 5.1.6.jar
objenesis - 1.2.jar
ojdbc - 14.jar
oro - 2.0.8.jar
poi - 3.9.jar
poi - contrib - 3.2 - FINAL.jar
poi - ooxml - 3.9.jar
poi - ooxml - schemas - 3.9.jar
poi - scratchpad - 3.2 - FINAL.jar
quartz - 1.8.5.jar
quartz - jboss - 1.8.5.jar
quartz - oracle - 1.8.5.jar
quartz - weblogic - 1.8.5.jar
ridl - 2.3.0.jar
slf4j - api - 1.5.11.jar
slf4j - log4j12 - 1.5.11.jar
sndng - mail - 1.0.jar
spring - aop - 3.0.5.RELEASE.jar
spring - asm - 3.0.5.RELEASE.jar
spring - beans - 3.0.5.RELEASE.jar
spring - context - 3.0.5.RELEASE.jar
spring - context - support - 3.0.5.RELEASE.jar
spring - core - 3.0.5.RELEASE.jar

spring - expression - 3.0.5.RELEASE.jar
spring - jdbc - 3.0.5.RELEASE.jar
spring - modules - validation - 0.9.jar
spring - orm - 3.0.5.RELEASE.jar
spring - security - acl - 2.0.4.jar
spring - security - core - 2.0.4.jar
spring - security - core - tiger - 2.0.4.jar
spring - security - taglibs - 2.0.4.jar
spring - support - 2.0.8.jar
spring - test - 3.0.5.RELEASE.jar
spring - tx - 3.0.5.RELEASE.jar
spring - web - 3.0.5.RELEASE.jar
spring - webmvc - 3.0.5.RELEASE.jar
standard - 1.1.2.jar
stax - api - 1.0.1.jar
stringtemplate - 3.1 - b1.jar
twitter4j - core - 2.1.3.jar
unoil - 2.3.0.jar
xmlbeans - 2.3.0.jar
xmlworker - 5.5.6.jar

### 3.6. WEB - INF/lib

lib .

xercesImpl - 2.10.0.jar
xml - apis - 1.3.04.jar

### 3.7. WEB - INF/classes

## 4. – 가

### 4.1. application Deployment Descriptor 가

### 4.2. Web Deployment Descriptor 가

#### 4.2.1. ibm - web - bnd.xmi

*ibm - web - bnd.xmi*      *session timeout*      *WEB -*  
*INF/web.xml*      *<session - config/>*      *가*      *.*

WEB - INF\ibm - web - bnd.xmi

```
<?xml version="1.0" encoding="UTF - 8"?>
<com.ibm.ejs.models.base.bindings.webappbnd:WebAppBinding xmi:version="2.0"
xmlns:xmi="http://www.omg.org/XMI"
xmlns:com.ibm.ejs.models.base.bindings.webappbnd="webappbnd.xmi"
xmi:id="WebAppBinding_1483517818161" virtualHostName="ap_asset_kr_2016">
  <webapp href="WEB - INF/web.xml#WebApp_ID"/>
</com.ibm.ejs.models.base.bindings.webappbnd:WebAppBinding>
```

#### 4.2.2. jboss - web.xml

WEB - INF\jboss - web.xml

```
<?xml version="1.0" encoding="UTF - 8"?>
<!DOCTYPE jboss - web PUBLIC " - //JBoss//DTD J2EE Application 5.0//EN"
"http://www.jboss.org/j2ee/dtd/jboss - web_5_0.dtd">
<jboss - web>
  <class - loading java2ClassLoadingCompliance="false">
    <loader - repository>
      com.athena.chameleon:loader=ASSET_WEB
      <loader - repository - config>java2ParentDelegation=false</loader -
repository - config>
    </loader - repository>
  </class - loading>
</jboss - web>
```

#### 4.2.3. ibm - web - ext.xmi

*ibm - web - ext.xmi*      *session timeout*      *WEB -*

INF/web.xml      <session - config/>      가 .

WEB - INF\ibm - web - ext.xmi

```
<?xml version="1.0" encoding="UTF - 8"?>
<com.ibm.ejs.models.base.extensions.webappext:WebAppExtension
xmi:version="2.0" xmlns:xmi="http://www.omg.org/XMI"
xmlns:com.ibm.ejs.models.base.extensions.webappext="webappext.xmi"
xmi:id="WebAppExtension_1483517818161">
  <webApp href="WEB - INF/web.xml#WebApp_ID"/>
  <jspAttributes xmi:id="JSPAttribute_1483517818161" name="reloadEnabled"
value="true"/>
  <jspAttributes xmi:id="JSPAttribute_1483517818162" name="reloadInterval"
value="10"/>
</com.ibm.ejs.models.base.extensions.webappext:WebAppExtension>
```

WEB - INF\jboss - web.xml

#### 4.3. EJB Deployment Descriptor 가

EJB 2.x      EJB Deployment Descriptor가 .  
 ejb - jar.xml      EJB Deployment Descriptor , WAS      Descriptor .

WebLogic      weblogic - ejb - jar.xml      JNDI .  
 JBoss      jboss.xml .

## 5. Tomcat

Tomcat  
Tomcat JBoss EWS(Enterprise Web Server) , Tomcat

### 5.1. Tomcat

URL tomcat

- Download URL : <http://tomcat.apache.org/download-60.cgi>
- Version : 6.0.35

**Tomcat 6 Downloads**

Welcome to the Tomcat 6.x download page. This page provides download links for obtaining the latest version of Tomcat 6.

**Quick Navigation**

[KEYS](#) | [6.0.35](#) | [Browse](#) | [Archives](#)

**Release Integrity**

You **must** verify the integrity of the downloaded files. We provide OpenPGP signatures for every release file. This signature keys of Tomcat's Release Managers. We also provide an MD5 checksum for every release file. After you download the file, is the same as ours.

**Mirrors**

You are currently using <http://apache.mirror.cdnetworks.com/>. If you encounter a problem with this mirror, please select the end of the mirrors list that should be available.

Other mirrors:

**6.0.35**

Please see the [README](#) file for packaging information. It explains what every distribution contains.

**Binary Distributions**

- Core:
  - [zip \(pgp, md5\)](#)
  - [tar.gz \(pgp, md5\)](#)
  - [32-bit Windows zip \(pgp, md5\)](#)
  - [64-bit Windows zip \(pgp, md5\)](#)
  - [64-bit Itanium Windows zip \(pgp, md5\)](#)
  - [32-bit/64-bit Windows Service Installer \(pgp, md5\)](#)
- Deployer:
  - [zip \(pgp, md5\)](#)
  - [tar.gz \(pgp, md5\)](#)

**Source Code Distributions**

- [tar.gz \(pgp, md5\)](#)
- [zip \(pgp, md5\)](#)

### 5.2.

Tomcat  
Tomcat

```
$ cd Downloads
$ unzip apache - tomcat - 6.0.35.zip
$ mv apache - tomcat - 6.0.35 /platform/tomcat
```

```
$ chown -R tomcat:tomcat /platform/tomcat/  
$ cd /platform/tomcat/bin  
$ chmod +x *.sh  
$ ls -al
```

### 5.3. Tomcat

Tomcat 가 ,  
가 .

#### 5.3.1. env.sh

```
#!/bin/bash  
# ***** Warning *****  
# *  
# * This configuration is property of OPEN SOURCE CONSULTING, INC. *  
# * Don't distribute this to other project. *  
# *  
# * Contact jchoi@osci.kr(http://www.osci.kr) *  
# *****  
  
# This is tomcat env.sh for iosp by Open Source Consulting, Inc  
  
## Set Tomcat base env  
export JAVA_HOME=/opt/java1.6  
export SERVER_NAME=template  
export CATALINA_HOME=/platform/tomcat  
export CATALINA_BASE=/platform/servers/$SERVER_NAME  
  
## Set Port Configuration  
#####  
# Default Ports are as below #  
# HTTP_PORT : 8080#  
# SSL_PORT : 8443#  
# SHUTDOWN_PORT : 8005 #  
#####  
export HTTP_PORT=8180  
export AJP_PORT=8109  
export SSL_PORT=8543  
export SHUTDOWN_PORT=8105  
  
export COMP_USER=root
```

```
if [ "x$JAVA_OPTS" = "x" ]; then
    JAVA_OPTS=" - server"
    JAVA_OPTS="$JAVA_OPTS - Dserver=$SERVER_NAME"
    JAVA_OPTS="$JAVA_OPTS - Dhttp.port=$HTTP_PORT"
    JAVA_OPTS="$JAVA_OPTS - Dajp.port=$AJP_PORT"
    JAVA_OPTS="$JAVA_OPTS - Dssl.port=$SSL_PORT"
    JAVA_OPTS="$JAVA_OPTS - Dshutdown.port=$SHUTDOWN_PORT"

    #  JAVA_OPTS="$JAVA_OPTS - noverify"
    JAVA_OPTS="$JAVA_OPTS - Xms512m"
    JAVA_OPTS="$JAVA_OPTS - Xmx512m"
    JAVA_OPTS="$JAVA_OPTS - XX:PermSize=256m"
    JAVA_OPTS="$JAVA_OPTS - XX:MaxPermSize=256m"
    #  JAVA_OPTS="$JAVA_OPTS - Xss128k"

    JAVA_OPTS="$JAVA_OPTS - verbose:gc"
    JAVA_OPTS="$JAVA_OPTS - Xloggc:/platform/logs/$SERVER_NAME/gc.log"
    JAVA_OPTS="$JAVA_OPTS - XX: +PrintGCDetails"
    JAVA_OPTS="$JAVA_OPTS - XX: +PrintGCTimeStamps"
    JAVA_OPTS="$JAVA_OPTS - XX: +PrintHeapAtGC"
    JAVA_OPTS="$JAVA_OPTS - XX: +HeapDumpOnOutOfMemoryError"
    JAVA_OPTS="$JAVA_OPTS -
XX:HeapDumpPath=/platform/logs/$SERVER_NAME/java_pid.hprof"

    #  JAVA_OPTS="$JAVA_OPTS - Dcom.sun.management.jmxremote"
    #  JAVA_OPTS="$JAVA_OPTS - Dcom.sun.management.jmxremote.port=8186"
    #  JAVA_OPTS="$JAVA_OPTS - Dcom.sun.management.jmxremote.ssl=false"
    #  JAVA_OPTS="$JAVA_OPTS -
Dcom.sun.management.jmxremote.authenticate=false"

    JAVA_OPTS="$JAVA_OPTS - Djava.net.preferIPv4Stack=true"
    JAVA_OPTS="$JAVA_OPTS - Dsun.rmi.dgc.client.gcInterval=3600000"
    JAVA_OPTS="$JAVA_OPTS - Dsun.rmi.dgc.server.gcInterval=3600000"
    JAVA_OPTS="$JAVA_OPTS - Dsun.lang.ClassLoader.allowArraySyntax=true "
fi

export JAVA_OPTS

echo
"===== "
echo "CATALINA_HOME=$CATALINA_HOME"
echo "SERVER_HOME=$CATALINA_BASE"
```

```
echo
"=====
```

### 5.3.2. start.sh

```
#!/bin/bash
. ./env.sh

DATE=`date +%Y%m%d%H%M%S`

# -----
PID=`ps -ef | grep java | grep "=$SERVER_NAME" | awk '{print $2}'`
echo $PID

if [ e$PID != "e" ]
then
echo "Tomcat ($SERVER_NAME) is already RUNNING..."
    exit;
fi

# -----
UNAME=`id -u -n`
if [ e$UNAME != "e$COMP_USER" ]
then
echo "$COMP_USER USER to start this SERVER! - $SERVER_NAME..."
    exit;
fi

# -----

mv $CATALINA_BASE/logs/$SERVER_NAME.out
$CATALINA_BASE/logs/$SERVER_NAME.$DATE
mv $CATALINA_BASE/logs/gc.log $CATALINA_BASE/logs/gc.log.$DATE

nohup $CATALINA_HOME/bin/catalina.sh run >>
$CATALINA_BASE/logs/$SERVER_NAME.out 2>&1 &

# -----
if [ e$1 = "enotail" ]
then
    echo "Starting... $SERVER_NAME"
    exit;
fi

# -----
```



```
$CATALINA_BASE/tail.sh
```

### 5.3.3. stop.sh

```
#!/bin/bash
. ./env.sh

$CATALINA_HOME/bin/shutdown.sh
```

### 5.3.4. kill.sh

```
#!/bin/bash
. ./env.sh

ps -ef | grep java | grep "server=$SERVER_NAME" | awk {'print "kill -9 " $2'} | sh -x
```

### 5.3.5. tail.sh

```
# !/bin/bash
. ./env.sh

tail - 200f $CATALINA_BASE/logs/$SERVER_NAME.out
```

*Note.*

## 5.4. Tomcat

```
Tomcat          tomcat      가          webapps
      .      war      webapps      ,      (exploded)
```

6.

Prepared by \_\_\_\_\_  
Red Hat Certified Engineer, Open Source Consulting, Inc.

Approved by \_\_\_\_\_  
Project Manager

## **7. APPENDICES**

### **7.1. Document Guidelines**

<https://www.jboss.org/community/wiki/jbossapplicationserverofficialdocumentationpage>

### **7.2. Project Migration Report Sections Omitted**